

RIDE

CORE

QUICK START GUIDE

Powered by SCORPIO




To get started with Ride, install the Core device on your bike using this guide. When installing modules, refer to the respective guides.

If a Secure Kit was purchased with your Ride Core, please refer to the Secure Kit Quick Start Guide. The included Ride Core Harness will not be used.


For a more detailed User Manual, please visit ridescorpio.com/help

COMPONENTS

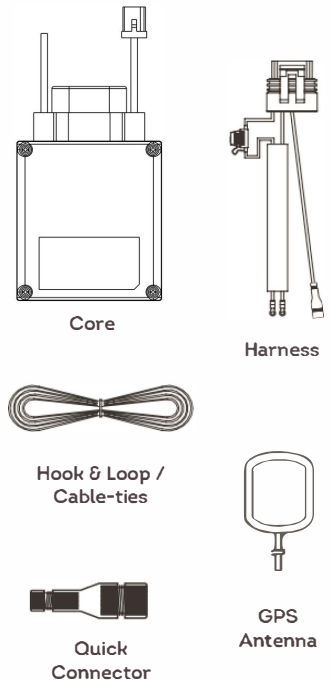

STEP 1: MOUNTING

Select a suitable location under the seat or side cover that the module can lay as flat as possible.

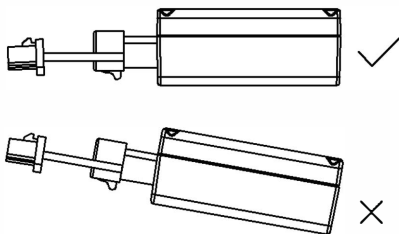

STEP 2: HARNESS INSTALL

The Ride Core harness has three wires that you will need to connect to your bike.

Red Wire (+): Install the terminal ring of this wire directly to the battery positive post.

Black Wire (-): Install the terminal ring of this wire directly to the battery negative post.




White Wire: Install this wire to a 12 volt switched source using the provided Quick Connector.

For example: The tail light or license plate light power wire.

Do not attach the Ride's white wire to any LED light sources, LED lights operate at a lower voltage.

Remove the cap on the open end of the Quick Connector attached to the white wire of the installation harness. Insert the switched power wire of the vehicle into the slot in the cap. Tighten the cap back on to the Quick Connector.

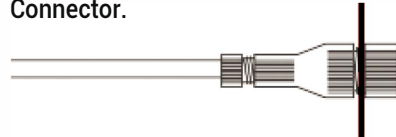


COMMON TAIL LIGHT WIRE COLORS

Honda - Brown or White w/black stripe
Yamaha - Blue w/Red stripe
Harley-Davidson - Blue
Kawasaki - Red
Suzuki - Brown
Ducati - Yellow


STEP 3: ATTACH GPS

Attach the GPS antenna to the Ride module. Secure the GPS antenna in a safe location where it is not blocked by metal and pointed toward the sky. The antenna is magnetic, but also secure it with the included hook & loop/ cable ties.

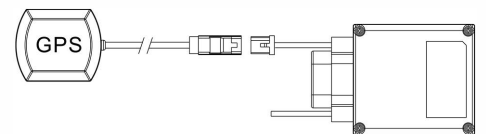

STEP 4: PLUG IN CORE

Plug the installation harness into the Ride module. Secure the module with the included hook & loop/cable ties.

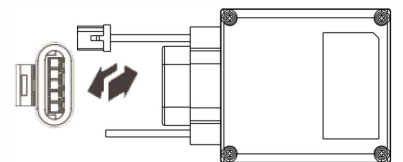

STEP 5: TESTING THE INSTALLATION

Once the harness is plugged in confirm that there are lights illuminated on the Ride module to ensure you have good power and ground.

Turn the ignition switch of the motorcycle to the "on" position. Confirm that the red light turns solid on the Ride module. Shortly after the red light turns on, it will resume the diagnostic flashing pattern.



Turn the ignition switch to the "off" position. Confirm that the red light on the module is now blinking.



TECH TIPS

RIDE requires proper installation of the switched power wire to function correctly. Switched power is hot (12 volts) when the ignition is on, zero volts when off.

Common switched power sources are the tail light, (NOT the brake light), the license plate light, and some accessory plugs.

RIDE has an internal cellular and external GPS antenna. Do not mount in a location where the unit will be completely blocked by metal (such as under the fuel tank). Ideal locations are under the seat or in the tail section.

Need More Help?

Visit our online support:
www.ridescorpio.com/help
help@ridescorpio.com
or call our Technical Support:
US: 1 800 428 0440
INT:+1 480 951 1109
Mon-Fri, 8 a.m. to 5 p.m. MST



Download the app and sign up for an account. Then, scan your IMEI and activate your subscription account.



Ready to ride.

Log on with the app and Rider Dash at rides-corp.io/dash.

For a more detailed User Manual, please visit ridescorpio.com/help