

www.scorpioalarms.com
support@aritrnix.com

Phone
(480)951-1109

Aritronix Ltd
16055 N. Dial Blvd. Suite B-10
Scottsdale, AZ 85260

SCORPIO
/MOTOSECURE/

SR-i900 Series

V9.5



Important Information

Save this information for future use.

Date of purchase ____/____/____

Place of purchase _____

Invoice/Receipt # _____

Model Number _____

Production Code _____

Notes:

FCC Notice

This device complies with Part 15 of FCC rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) This device must accept any interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this device.

FCC ID:
TRS-9 ARIMKF50
MCM-9 ARIMKF51

SPECIAL NOTE ON RANGE

The average reception range is approximately ½ mile (800 meters). The actual reception range could be greater or less depending on the location and/or the presence of obstacles between the vehicle and the receiver. The reception range can also be affected by the presence of strong electromagnetic interference from outside sources.



Installation

User's Guide

Transceiver Information

Optional Accessories

Appendix

Table of Contents

Installation

Component List	3
Planning the Installation	3
Installation Diagram	4
Installation Warnings and Notes	5
Mounting the Components	5
Routing the Antenna Wire	5
Making Connections	5
Color Code Chart	6
Using the T-tap Connectors	6

User's Guide

Remote Transceiver Icons and Message Display	7
Transceiver Charging Instructions	7
Transceiver Battery Status	7
Motorcycle Battery Status	7
Transceiver Back Light	7
Operating Instructions	8
Auto Arm	8
Activate Perimeter Sensor	8

Panic / Stop Trigger	8
Auto Disarm	8
Manual Disarm	8
Manual Arm	8
Programming and Customizing Instructions	9
Entering Programming mode	9
Selecting Perimeter Sensor Default	9
Selecting Transceiver Alert Type	10
Adjusting the Accelerometer	10
Selecting Siren Default	11
Setting the Clock	11
Encoding the Transceiver	12

Additional Information

Sensor Memory display	13
Motorcycle battery safeguard	13

Limited Warranty

Limited Warranty

Products manufactured by Arित्रonix, Ltd are warranted by the company to the original consumer purchaser to be free from defects in workmanship and materials. Should a product be found defective, Arित्रonix shall repair or replace the product or any part of the product which Arित्रonix agrees is defective without charge during the first 12 months from the date of original purchase provided that the product is returned to Arित्रonix freight prepaid and accompanied by a copy of the purchase receipt.

This warranty does not apply to any product damaged by accident, physical or electrical misuse or abuse, improper installation, alteration, any use contrary to its intended function, fire, flood, unauthorized repair or any other acts of God.

Arित्रonix shall not be responsible for removal and/or reinstallation charges or theft of the motorcycle or its contents or any incidental or consequential damages caused by any failure of the product to function properly. Under no circumstances should this warranty or the product covered by warranty be construed as an insurance policy against loss or damage of any kind.

Arित्रonix neither assumes nor authorizes any person or organization to make any warranties or assume any liability in connection with the sale, installation, or use of this product.

This completes Arित्रonix warranty and no other warranty exists.

What should you do if you experience a problem with a Scorpio product?

First contact Arित्रonix, Ltd **[Proof of purchase, installer and motorcycle information will be requested]**. If after assistance from our trained staff it is determined that the Arित्रonix product may be faulty then you will be provided with detailed information on processing a warranty claim and instructions on how to send the product into our repair office. All warranty claims must contain a return material authorization (RMA). Arित्रonix will not accept any package that has not been approved for warranty repair/exchange and an issued RMA. **Shipping charges may apply.**

Troubleshooting guide

Problem	Possible Cause	Solution
Will not arm	RFID antenna not connected	Verify connection from MCM to RFID antenna
	Power or ground not connected	Verify connection to power lead and ground connection
	Orange wire not connected	Verify connection to 12 volt wire with key on. (tail light on most bikes)
Turn signals will not flash	Grey wires from GEN-1 not connected or connected to wrong wires	Test wires and change connections to correct wires
Perimeter Sensor not working <small>* Test with Remote 7-10 feet away from bike</small>	Sensor not connected	Check connections
	System set on default with sensor off	Enter Programming mode and change default
Ignition Disable does not work <small>* Test with Remote 7-10 feet away from bike</small>	Orange wire from GEN-1 not connected	Connect orange wire from GEN-1 to 12 volt (+) with ignition key on. In most bikes that is the tail light wire
	Ignition disable not connected to correct wire on bike	Refer to options on the ignition disable instruction page. Test selected wire before reconnecting RID-5 wires.

Manual Override Procedure

Programming Personal Override Code	14
Enter Programming Mode	14
Select number of flashes for Code	14
Using Code in case of lost remote	14

Transceiver Information

Alarm Triggers	15
Range Confirmation Signal	16
Checking Violation Display	16
Transceiver Battery Information	17
Low Battery Stages	17

Optional Accessory Instructions

Perimeter Sensor (SN 5)	19
Back up Battery (BAT-5)	20
Ignition Disable / Anti hijack Unit	21-22

Appendix

Troubleshooting guide	a1
Limited Warranty	a2
Important Information / Notes	a3
FCC Information	a3
Special Note	a3

Installation

Components



Component Check List


- TRS-9
- MCM-9
- RFID antenna
- AC Adapter
- GEN-1(Bag)
- T-taps x4
- ACC-1(Bag)
- Velcro Pieces x2
- Zip Ties x4
- Dust Cap x1
- HAR-1 (Bag)

Appendix


Planning the Installation

- Check that your motorcycle battery is fully charged.
- Check the layout of the motorcycle for placement of components.
- Verify that no moving parts interfere with the components or their wires.
- Verify that chosen location is not near extreme heat.


----- Installation Diagram -----

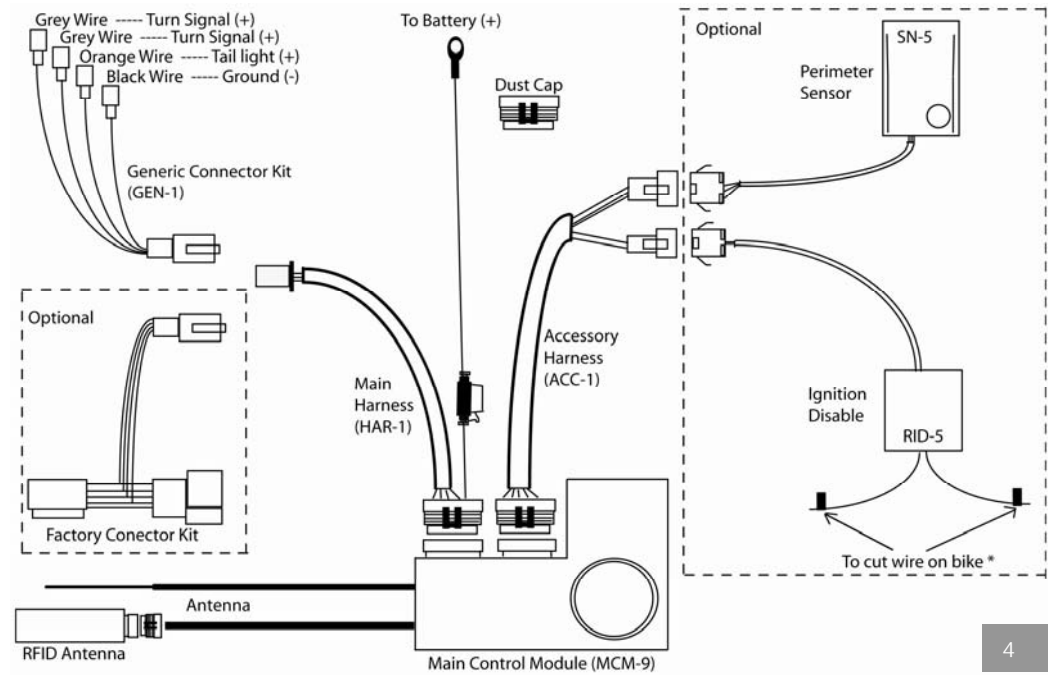

Installation Warnings and Notes

 : Connect the (HAR-1) harness to the MCM only after installation is completed. Make sure remote is close to the bike to avoid a trigger. *** Turn Signal wires will pulse 12V. If your turn signals are LED based, use caution when installing or contact Artronix Support for assistance***

Note: When the main harness (HAR-1) is plugged in, the siren should chirp. If the siren does not chirp; check the alarm inline fuse, connection to battery (+), and connection to ground (-).

 : If the battery is to be removed, disconnect HAR-1 connector first. Reconnect only after battery terminals are reconnected.

Mounting the Components


Select a suitable location underneath the seat or in a side cover. Mount components using velcro or cable ties. Make sure that the components are not exposed or accessible.

- o Place MCM as flat as possible to achieve best performance.
- o Place RFID antenna under seat or tail section, do not chose a location that is covered with metal.

Routing the Antenna Wire

For best performance the last 6" of the antenna should:

- o Be as vertical as possible.
- o Be away from metal as much as possible.



Making Connections


The necessary connector or wires are found under the seat or in the tail section of the bike. Removal of the tail section plastics or side cover might be necessary.

Ignition / Engine Control Wire Options:

- Option #1: Positive lead wire on fuel pump
- Option #2: Positive lead wire on fuel injection system
- Option #3: Positive wire that goes to the ignition fuse in fuse box. This should be either a 10 or 15 amp fuse labeled **IGN**. (Carbureted Bikes Only)
- Option #4: Ground wire from ignition module
- Option #5: Positive wire from ignition module to ignition coil

Operating the Anti-Hijack Feature

While the engine is running, press and hold the transceiver's **button 1** and **button 2** at the same time for 3 seconds. The siren will begin to chirp confirming that the Anti-Hijack feature has been activated. 15 seconds later, the siren will go off continuously, and the engine will shut down. To disarm, turn off the ignition switch and press button 2.

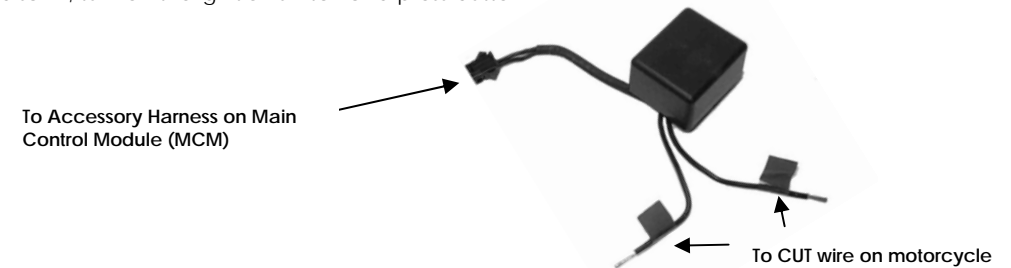

Ignition Disable / Anti-hijack Module (RID-5)

Installation

1. Cut the Ignition / Engine control wire (refer to options on page 22)
2. Attempt to start bike to test if correct wire is selected *. If bike starts, the wrong wire is selected.(contact Aritrnix for assistance) If bike does not start, correct wire was selected continue to step 3.
3. When packaged, the RID-5 wire ends have been treated with clear silicon to protect the ends from fraying. Make sure they are stripped bare of this before continuing.
4. Connect one end of the cut wire to one of the blue tabbed wires in RID-5 with provided butt connector or any other solid connection option.
5. Connect second end of the cut wire to second blue tabbed wire in RID-5 with provided butt connector or any other solid connection option.
6. Test connections to insure that they are as solid as possible. **
7. Plug the RID-5 connector into the matching connector on the Accessory Harness.
8. Test RID-5 by activating alarm (without perimeter sensor) and try to start bike. If bike starts, please contact Aritrnix for assistance.

* Test this feature with the remote at least 7-10 feet away from the bike.

** Failure to test for a loose wire could cause an accidental engine cut off.


----- Skip this page if using Factory Connector Kit -----

Color Codes: (Color codes are not always valid. Always verify before making connections)

	Ground (-)	Tail Light	Left Turn Signal	Right Turn Signal
Honda	Green	Brown	Orange	Blue
Kawasaki	Black	Red	Green	Grey
Suzuki	Black/White	Brown	Green or Black	Grey
Yamaha	Black	Blue	Green	Brown
Harley Davidson	Black	Blue	Brown	Purple
Ducati	Black	Yellow	White/Black	White/Green

Using the T-tap Connectors and GEN-1 Connector

- 1) Place the female T-tap connector over wire, close and squeeze until it snaps.
- 2) Slip male T-tap connector over hinged end of the female connector to make a connection.

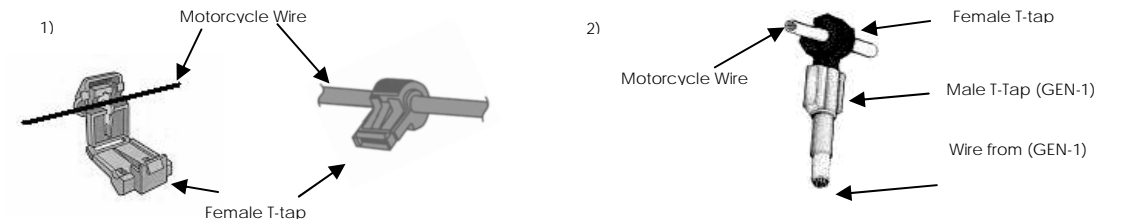



User's Guide




Charging Instructions

We recommend that the transceiver be charged for up to 12 hours to ensure full life of the battery.

1. Plug in provided charger into the transceiver.
2. While the transceiver is charging, the  icon will scroll from empty to full.
3. When the transceiver is fully charged, the  icon will no longer scroll.

It is recommended to recharge the transceiver every day to maintain full function.

Remote Battery Status

The LCD will display 3 different  icons to show the transceiver battery status.

Motorcycle Battery Status

Every time the alarm is activated or deactivated, the LCD will display a text message with the current battery voltage.


bAtt: 12.4

If motorcycle battery drops below 11 volts, the screen will display CyCLE bAtt LO.

Transceiver Back light

From the main screen, press button 1 or 2, the screen's back light will turn on for 2 seconds.

Back-up Battery (BAT-5)

The back-up battery provides the system the ability to transmit information and activate the siren when power is interrupted. If power is ever interrupted while the system is activated, the back-up battery will be engaged. The transceiver will receive a  trigger and the siren will sound in 30 second increments. If power is not restored, the alarm will continue to transmit and sound for six cycles.

Note: The system has to be correctly installed for at least 12 hours before full function of the back-up battery can be used.

To check the status of the back-up battery, arm the system without the Perimeter Sensor.

- If the system chirps 3 times the back-up battery is in good working condition
- If the system chirps 2 times the back-up battery is not fully charged or not installed.

Note: If power is purposely being interrupted when the alarm is activated, turn ignition key on and off before disconnecting power to limit the back-up to two cycles instead of six.

Note: If the system chirps only 2 times and it has been correctly connected for more the 12 hours, the battery needs replacement. (Contact Arironix for replacement options)

Perimeter Sensor (SN-5)

Mounting the SN-5

The Perimeter sensor uses high frequency microwave technology to detect mass density movement around the motorcycle. The signal can transmit through the seat, fiberglass, leather and plastic, but not metal. It is recommended to place this sensor under the seat as close as possible to the center of the motorcycle. With the provided Velcro, you can mount this sensor on top of the battery or any flat surface, making sure that the top side of the sensor is facing upwards. Place the perimeter sensor as faraway from the MCM as possible to prevent false alerts.

Adjusting the Sensor

Although the sensor is pre set from the factory, it may be necessary to adjust the sensitivity to suit your needs. Remove the plastic cap and turn the adjustment screw.

To increase sensitivity, turn adjustment screw clockwise.

To decrease sensitivity, turn the adjustment screw counter clockwise.

Plastic Cap:
Remove to adjust
sensitivity



To Accessory Harness on Main
Control Module (MCM)

Note: Do not turn sensitivity above half way. Doing so may cause false alarms.

Operating Instructions

The SR-i900 by default, will be in auto arm mode and will activate with the perimeter sensor off and the siren on, five seconds after turning the ignition key off.

Auto Arm

Turn ignition key off. Walk away from bike



Siren:
Chirp 3 Times

Turn Signals:
Flash 1 Time

Activate Perimeter Sensor

Press and hold button 1 and 2



Siren:
Chirp 4 Times

Turn Signals:
Flash 1 Time

Panic / Stop Trigger (when system is armed)

Press and hold button 1



Siren:
Chirp 6 Times

Turn Signals:
Flash 1 Time

Auto Disarm

Walk next to bike. Turn ignition key on




Siren:
Chirp 1 Time

Turn Signals:
Flash 1 Time

Manual Disarm

Press and hold button 2



Siren:
Chirp 1 Time

Turn Signals:
Flash 1 Time

Note: If the system is manually disarmed, it will stay in disarmed mode. In this mode, the system will not auto arm upon turning ignition key off. To re-enable the Auto Arm feature, hold button 1.

Manual Arm (system has to be manually disarmed first)

Press and hold button 1




Siren:
Chirp 3 Times

Turn Signals:
Flash 1 Time


Programming and Customizing Instructions

Entering Programming Mode


1) Press button 2 twice quickly to enter programming mode



2) Press button 2 again to scroll through programmable options



3) Press button 1 to select icon and to begin programming




Programmable options will be displayed. The selected icon will flash


Note: Remote will time-out of programming mode after 20 seconds of inactivity. No changes will be saved.

Note: To exit programming mode, scroll through all icons once.


Selecting Perimeter Sensor Default

Enter programming mode. The  icon will begin to flash, press button 1 to enter the perimeter sensor menu. The LCD will display the current setting. To program, follow these steps:

Press button 1 to cycle between the options



Press button 2 to save and exit



PER: on – Perimeter sensor will be **enabled** every time alarm is armed

PER: off – Perimeter sensor will be **disabled** every time alarm is armed

Optional Accessories:


- Perimeter Sensor (SN-5)
- Back-up Battery (BAT-5)
- Ignition Disable (RID-5)

Transceiver Battery Information

The receiver consists of two functions, RFID functions, and Two-way FM communication.

Low Battery Stages


It is recommended that the transceiver be charged daily. If the transceiver is not charged daily, the following stages will occur.


Low Battery: When the battery is low, the  icon will cycle from 3 bars to 2 bars to 1 bar. The transceiver should be charged as soon as possible.

Two-Way Off: If the transceiver is not charged, at some point (approximately 7 days) Two-way communication will shut off. In this mode, the LCD displays [rFid onLy]. The RFID system will still operate and you will still be able to automatically and manually arm and disarm the system.


No Response: If the battery is not recharged and all power is drained. The transceiver will not respond or communicate to the alarm system. The transceiver has to be charged before it can operate the system again.


Selecting Transceiver Alert Type (Audible/Silent/Vibrate)

Enter programming mode. Scroll to the  icon, press button 1 to select. The LCD will display the current settings. To program, follow these steps:

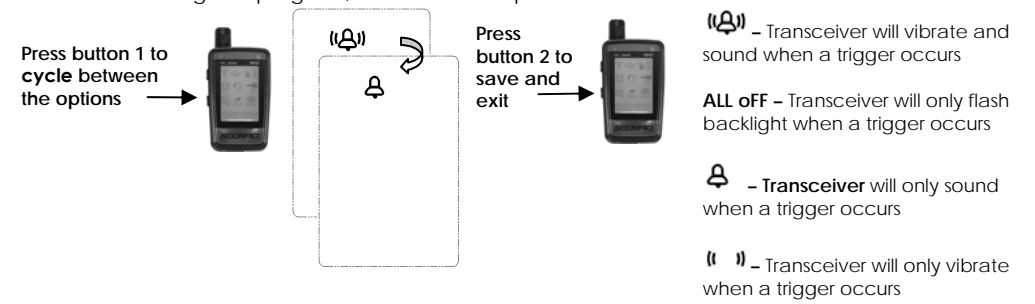



Adjusting the Accelerometer (Shock/Tilt) Sensor (proximity to MCM required)

Enter the programming mode. Scroll to the  icon and press button 1 to select. The screen will display the current sensitivity setting, and the siren will chirp 1-5 times to confirm sensitivity level. To program, follow these steps:

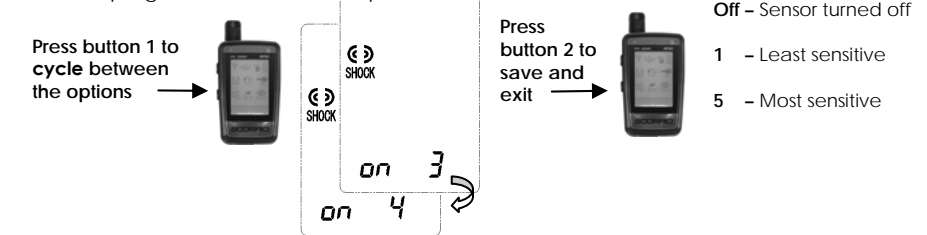


Selecting Siren Default

Enter programming mode. Scroll to the  icon and press button 1 to enter the siren menu. The LCD will display the current setting. To program, follow these steps:

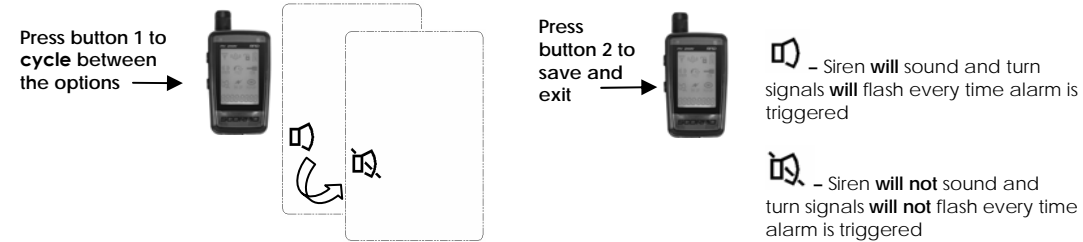

Setting the Clock


Enter the programming mode. Scroll to the time and press button 1 to select. The screen will display time with the hour flashing. To program, follow these steps:

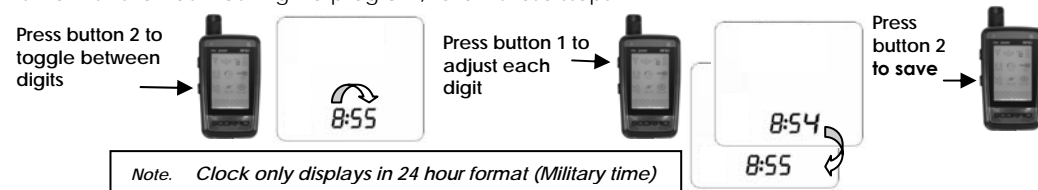

RCS (Range Confirmation Signal)

If the transceiver is within range of the MCM and the alarm is activated, the LCD will display  icon. If the transceiver does not receive the RCS; the  icon will not appear.

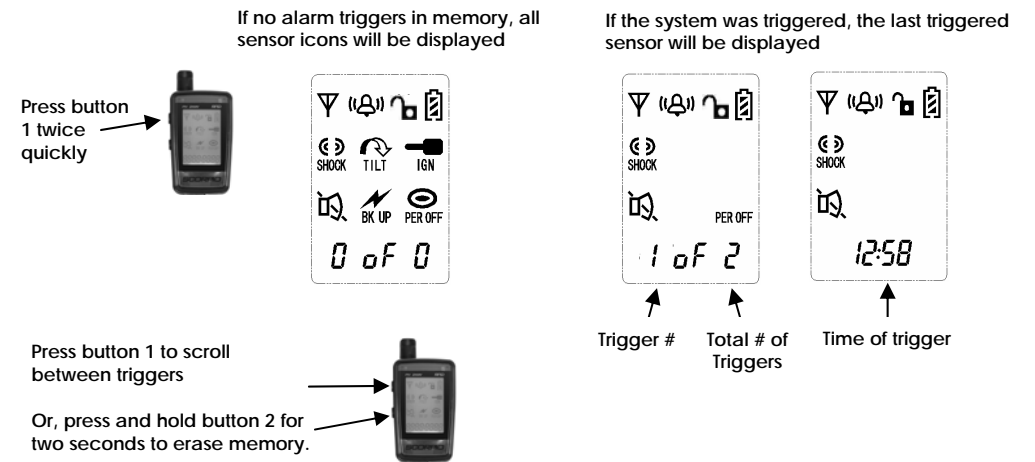




Checking Violation Display with Time Stamp



Transceiver Information

Alarm Triggers

When the system is triggered, the siren will sound and the turn signal lights will flash. The transceiver's LCD will display the following messages:

1. If bike is bumped, the LCD will display  icon. The siren on the bike will sound for 5 seconds and the lights will flash.
2. If the perimeter sensor triggers a full alarm cycle, the LCD will display  icon. The siren on the bike will sound for 5 seconds.
(Note: The turn signal lights will not flash for a perimeter sensor trigger).
3. If the bike is tilted, the LCD will display  icon. The siren on the bike will sound for 30 seconds and the lights will flash.
4. If the ignition switch is turned on or tampered with, the LCD will display  icon. The siren on the bike will sound for 30 seconds and the lights will flash. This cycle will repeat six times.
5. If the main harness or battery power supply is disconnected (with the Back-Up Battery installed and charged), the LCD will display  icon. The MCM-9 will still continue to sound and transmit from its internal power source. The siren on the bike will sound for 30 seconds.
6. The transceiver will continue to flash the triggered icon until any button is pressed.

Encoding a Transceiver

Note: The transceivers are programmed from the factory. Encoding is only necessary should the transceiver lose its code and will not arm or disarm the security system or if a replacement remote is obtained.

1. Unplug HAR-1 from the MCM-9 and plug it back in, the siren will chirp 2 times and the lights will flash 2 times. (If not disarmed, the BAT-5 will engage the siren until it is fully depleted, once the backup battery is depleted, plug the HAR-1 back in to continue.)
2. Within **6 seconds** of plugging in the HAR-1, (from the off position) turn the ignition switch "ON" and "OFF" 3 times.
3. If step 2 is done correctly and within the time allowed, the siren will chirp 2 times and the lights will flash an additional 2 times to confirm that the system is in "Learn Mode".
4. Press and hold button 1 until the system chirps 2 times and the lights flash 2 times to indicate that the MCM has learned the code. Release button 1, the transceiver will chirp 4 times with the LCD displaying **[LErn done]** to confirm that the transceiver is encoded.
5. Turn ignition "ON" then "OFF" to exit "Learn Mode".



Additional Information

Sensor Memory Display

When the system is disarmed, the turn signals will flash to indicate if there has been an alarm trigger. The lights will flash once to indicate that the system has been disarmed, additional flashes indicate that the following trigger has occurred:

- 1 flash then 1 additional flash = Shock Trigger
- 1 flash then 2 additional flashes = Tilt Trigger
- 1 flash then 3 additional flashes = Perimeter Sensor Trigger
- 1 flash then 4 additional flashes = Back-Up battery Trigger
- 1 flash then 5 additional flashes = Ignition Trigger

Motorcycle Battery Safeguard with "sleep mode"

- If the optional perimeter sensor is being used and the alarm is armed for more than **10 days**, the system will automatically disable the perimeter sensor.
- If the alarm is armed for more than **30 days**, the system will automatically shutdown its RF capabilities. In this mode, the transceiver will no longer be able to operate the system, but the system is still armed and is protecting the bike.
- To disarm, trigger the alarm, and press button 2.

Manual Override Procedure - (Not compatible with all bikes)

Programming Personal Override code

A personal override code will be a sequence of left – right - left turn signal flashes that can be used if the remote is lost to disable the alarm (Grey wires must be installed for this feature to work):


Enter programming Mode

1. Manually disarm system
2. Turn ignition on – off – on – off – on. The siren will chirp one time to confirm.
3. Press and hold **button 1 and 2 at the same time** for a few seconds until alarm chirps 3 times and flashes lights 3 times to confirm.

Select number of flashes for Code

The code will be a combination of left-right-left-right turn signal count.

1. Turn on left turn signal to desired number of flashes. (up to 9)
2. Turn on right turn signal to desired number of flashes. (up to 9)
3. Turn on left turn signal to desired number of flashes. (up to 9)
4. Turn on right turn signal once to exit mode. (Will only register one flash)
5. When done, the remote will display the sequence on the screen until a button is pressed, or for up to 30 seconds.
6. The bike will flash the code in the same sequence entered.

The image shows a rectangular LCD screen with a dashed border. Inside the screen, the text "Code: 2641" is displayed in a stylized font. The "2" and "6" are larger and more prominent than the "4" and "1".

(LCD screen will confirm code)

Using code in case of lost remote

1. Turn ignition key to on position. Let alarm go through a full cycle until the turn signal lights stop flashing. **(If the siren is turned off, you do not need to wait for a full cycle)**
2. Enter code as originally entered.
3. When correct code is entered, the alarm will deactivate